



**NEO LIFTKAR® SAL FOLD**

 **New powerful lithium battery**  
Autonomy up to 2000 steps up and down\*

# The handy tool

EASY TO  
TRANSPORT



## **SANO UK Powered Stairclimbers Ltd.**

Bristol Court, Betts Avenue  
Martlesham Heath  
Ipswich, Suffolk / IP5 3RY, England

Tel.: +44 1473 / 333 889

Fax: +44 1473 / 333 742

info@sano-uk.com

[www.sano-uk.com](http://www.sano-uk.com)

## **SANO Transportgeraete GmbH**

Gewerbezeile 15  
4040 Lichtenberg / Linz, Austria

Tel.: +43 7239 / 510 10

Fax: +43 7239 / 510 10-14

office@sano.at

[www.sano.at](http://www.sano.at)

f @ in



[www.sano.at](http://www.sano.at)

# ALL ADVANTAGES AT A GLANCE

- > intuitive user panel
- > as handy as a handtruck
- > extremely light weight machine: **16 kg** without battery
- > new powerful lithium battery with state-of-charge indicator. **Autonomy** up to **2000 steps** up and down\*
- > extremely lightweight lithium battery - only **1,6 kg**
- > step light for poor light conditions
- > extremely fast - up to **48 steps/min**, depending on the model
- > 2 speed levels: slow / fast
- > intelligent lifting unit starts automatically during downstairs operation
- > hinged toe plate attachment (optionally also fixed)
- > toe plate made of high-strength aluminium
- > friction clutch and electronic overload protection
- > for all types of stairs, even on spiral staircases and narrow landings
- > large pneumatic tyres or upgrade to puncture-proof tyres
- > foldable - easy to stow in any car trunk

## NEO LIFTKAR<sup>®</sup> SAL FOLD

The **NEO LiftKar SAL FOLD** is ideal for transporting loads such as stoves, fireplaces, tiles, washing machines, gas bottles, refrigerators and much more up and down stairs. The patented folding mechanism enables the stairclimber to be balanced ideally in relation to the load.

MODEL	110	140	170
climbing speed (max.)	48 steps/min.	35 steps/min.	29 steps/min.
autonomy (max.) steps up and down*	<b>2000 steps</b>	<b>2000 steps</b>	<b>2000 steps</b>
load capacity	110 kg	140 kg	170 kg
max. step height	210 mm	210 mm	210 mm
weight of base unit without battery	16,0 kg	16,0 kg	16,0 kg
dimensions (height/width/depth)	1550 (1000 folded) / 480 / 280 mm	1550 (1000 folded) / 480 / 280 mm	1550 (1000 folded) / 480 / 280 mm


\*sum up/down



 new intuitive user panel



 new step light

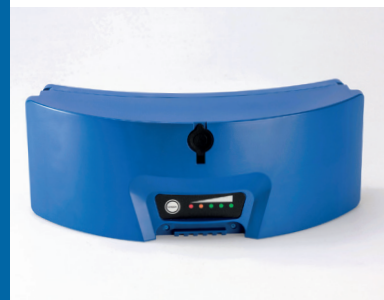

 new lithium battery

